


SPECIFICATION DATA SHEET

MODEL (ACV - 2000L)

APPROVALS & CERTIFICATIONS

- UL 142 / ULC S-601
- UN31 A/Y ADR
- CAN CG343, 146, 2002
- TSSA B1390 ON - 2006 (Optional)
- Lifting when Full Certified 450L to 3000L
- PPG 2 & PPG 26
- Vibration Tested
- Patent Design

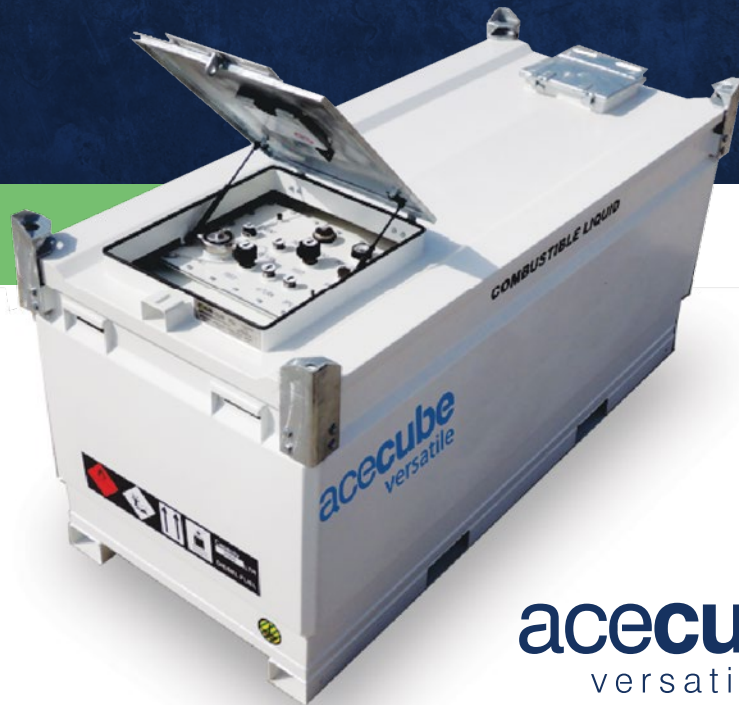

acecube
versatile

DESIGN FEATURES

- ✓ Bi-directional forklift plates, internal baffle plates, galvanised hatch plates, stacking corners & lifting eyes to allow safe & easy handling
- ✓ Designed to stack inside shipping containers & across truck beds providing economical transportation
- ✓ Unique hexagonal corners for extra strength. Three letter box openings for secure & safe hose connections
- ✓ Large designed dispensing gun equipment compartment with fixed arrangements to carry hose reels, pumps, gun nozzles, cables, batteries & bund alarms
- ✓ 110% bunded tank capacity - to meet the global environmental regulations
- ✓ Completely removable inner tank for easy maintenance & cleaning
- ✓ Primary & secondary hatch plates - for multiple use & versatility. The primary hatch plate acts as a man way
- ✓ The primary hatch plate is fitted with a 3 inch fill pipe, three - 1" return pipes & three - 1 1/4" feed pipes as standard for multiple use
- ✓ Space efficient design - easily stacked 2 high when full & 3 high when empty
- ✓ Unique pitched outer lid - designed to allow for dust & rain regress
- ✓ The primary hatch plate comes complete with a secure lockable design & and has beading around the lid closing position

SPECIFICATION DATA SHEET

MODEL (ACV - 2000L)

PRIMARY

3 inch fusible fill cap, 2 inch pressure vacuum vent, standard breather vent, 3 x 1¼" feed.
Fitting Plate: sockets, 3 x 1" return sockets, float level fuel gauge.

SECONDARY

Fitting Plate: Supplied with blank plate as standard, optional return & feed sockets available.

Capacity (Liters)	2000	Outer Tank Thickness (mm)	3
Capacity (US Gallons)	528	Inner Tank Thickness (mm)	3
Length (mm/ft)	2525/8'3"	Weight, Tare (Kg/lb)	980/2160
Width (mm/ft)	1085/3'7"	Weight, Laden (Kg/lb)	2680/5908
Height (mm/ft)	1075/3'6"	Safe Fuel Fill Levels (Liters)	1900

*Calculations are based on safe fill levels at 95% total tank capacity & specific gravity of diesel as 0.9

COMPLETELY REMOVABLE INNER TANK

Standard

Primary Hatch
Plate

Stacking Corner
and Lifting Eye


Universal Pump
Bracket

Optional

Retractable
Hose Reels

Dispensing
Nozzles

Electric
Pumps

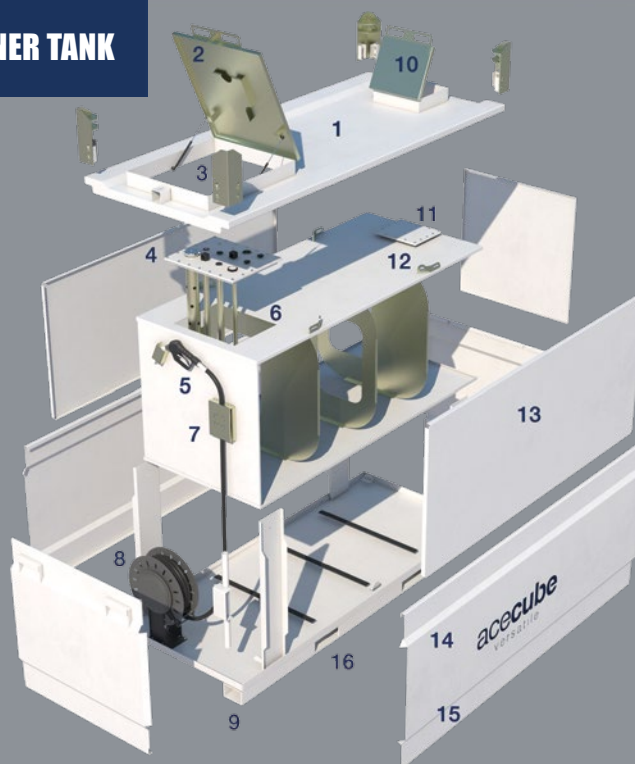

- 1 - External Lid
- 2 - Primary Hatch Cover Lid
- 3 - Stacking Cover with Lifting Lugs
- 4 - Primary Hatch Fittings Plate
- 5 - Bracket for Dispensing Nozzle
- 6 - Internal Steel Fuel Pipes
- 7 - Pump Bracket System
- 8 - Hose Reel Brackets
- 9 - Forklift Access
- 10 - Secondary Hatch Cover Lid
- 11 - Secondary Hatch Fittings Plate (fittings optional extra)
- 12 - Inner Primary Tank Lifting Lug
- 13 - Inner Primary Tank
- 14 - External Bund Tank
- 15 - Skid Mounted Base Frame
- 16 - Bi-Directional Forklift Pockets